

DATA-CONNECT

The Right Connection!



DCE 2178FMDEE

2x 10/100/1000Base-T and
2x 100/1000Base-X SFP OAM/IP GbE
Managed Switch

The Data Connect 2178FMDEE, Fiber Multi-Drop Ethernet Extender, is an IEEE 802.3ah OAM compliant dual copper and dual fiber Gigabit Ethernet switch solution designed to make conversion between 10/100/1000Base-T(X) and 100/1000Base-X with SFP. With embedded SNMP and Web-based management, the network administrator can monitor, configure and control the activity of each IEEE 802.3ah series card and remotely connected OAM compliant converter. Based on a powerful L2 switch architecture, this converter supports bandwidth control, duplex and speed configuration, VLAN tagging, Q-in-Q, QoS, Spanning tree, jumbo frames as well as auto laser shutdown, link fault pass through, OAM loop back and dying gasp. This card may also be controlled and monitored via an NMC in a managed chassis.

FEATURES


- 2-port 10/100/1000Base-T and 2-port 100/1000Base-X SFP
- Supports local / remote IEEE 802.3ah OAM / IP In-band management
- Standalone IP Based, Web GUI, Telnet, SNMP management
- Auto-Negotiation or forced mode
- Auto MDI/MDIX
- Supports IEEE 802.1Q Tagged and Port based VLAN
- Supports IEEE 802.1ad Q in Q double tagging
- Forward 10K bytes Jumbo packets (max.)
- Supports Flow control (Pause)
- Supports OAM remote loopback to assist in diagnosing network problems
- RADIUS Client
- Supports Far End Fault Indication (FEFI)
- Supports Link Fault Pass-Through (LFPT)
- Supports RMON counter
- Supports bandwidth control
- Supports remote CPE power fail detect (dying gasp)
- D/D function for supported SFP fiber transceiver
- Auto Laser Shutdown (ALS)
- Online local / remote f/w upgrade
- Fiber Redundant mode
- Spanning Tree Protocol
- Port Trunking
- Default port and 802.1p tag priority QoS
- Fixed or weighted priority QoS

SPECIFICATIONS

Optical Interface	Connector	SFP LC
	Data rate	125/1250Mbps
	Duplex mode	Full duplex
	Fiber	MM 50/125µm, 62.5/125µm. SM 9/125µm
Distance	MM	550m, 2km,
	SM	15/30/50/80/120
	WDM	20/40/60
Wavelength	NM	1310nm, SM 1310, 1550nm
	WDM	1310Tx/1550Rx (type A) 1550Tx/1310Rx (type B)
Power Consumption		
< 12W		
Dimensions	Card: 155 x 20.8 x 88mm (DxWxH)	
Weight	130g	

Electrical Interface	Connector	RJ45
	Data rate	10Mbps, 100Mbps, 1000Mbps
	Duplex mode	Half / Full duplex
	Cable	10Base-T Cat.3, 4, 5, UTP 100Base-TX Cat.5, 5e or higher 1000Base-T Cat.5, 5e or higher
Standards	IEEE 802.3, IEEE 802.3u, IEEE802.1Q, IEEE 802.3ah	
Indications	LED (Power, FX-Link, Test, TX-Link, TX-SPD)	
Power Input	12VDC	
Temperature	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)	
Humidity	10 ~ 90% non-condensing	
Certification	CE, FCC	
MTBF	65,000 hrs	

APPLICATION

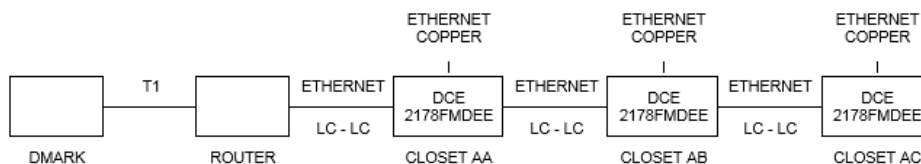

ORDERING INFORMATION

MODEL	DESCRIPTION
2178FMDEE	2-Port 10/100/1000Base-T and 2-Port 100/1000Base-X with OAM/IP management, (optional SFP)

DATA CONNECT ENTERPRISE

3405 OLANWOOD COURT OLNEY, MD 20832

Tel: 301.924.7400 EXT. 17

Fax: 301.924.7403

Email: sales@dataconnectus.com

www.dataconnectus.com



DCE reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2014 DATA CONNECT ENTERPRISE. All rights reserved.